
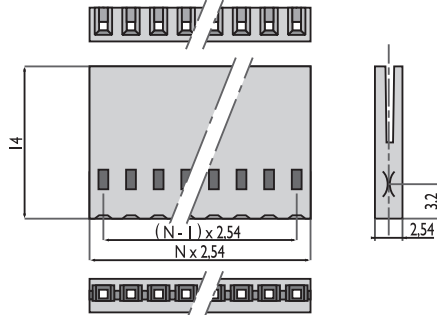



CRIMPFLEX® housings

HOUSING SERIES OF XX

- Removable connection with all types of 0.635 mm (.025") square or round pin headers.
- Housings are side to side and end to end stackable.
- Standard single housing for use with all female contacts or long male pins.



→ Mates with headers (tin or gold plated)
 ref. 12-17-111-xx-1
 ref. 12-17-141-xx-1
 (refer to page 34)



POLARIZATION	LOCKING SYSTEM	NUMBER OF ROWS	NUMBER OF WAYS XX
NO	NO	1	02 → 25 (on request : 26 → 51)

Dimensions in mm




NICOMATIC

Female contacts

LOW INSERTION FORCE REF. 11506

- Au = 1.5 N max (5.5 oz)
- Sn = 3 N max (11 oz)

Number of mating cycles = 500
 Number of mating cycles = 50

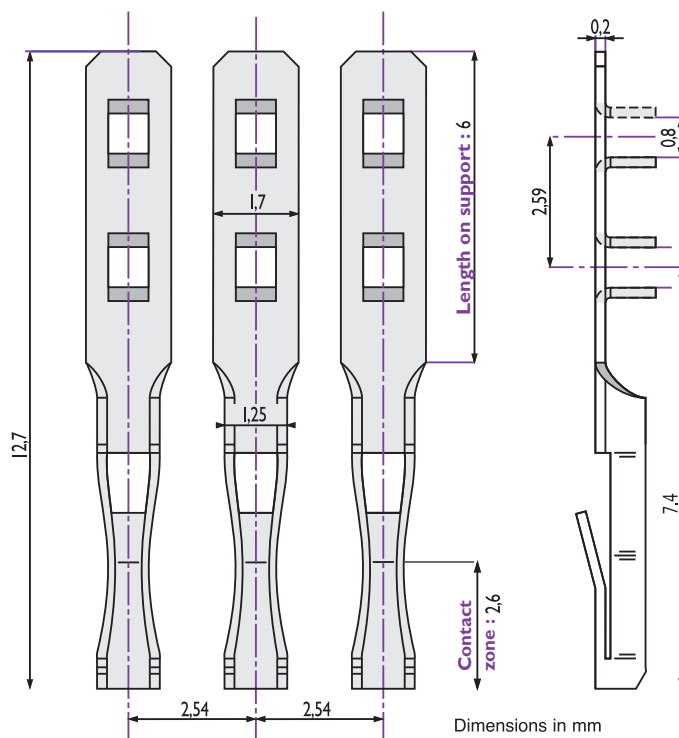

Dimensions in mm

NICOMATIC